

Pneumatic lifting device type 2740



Pneumatic lifting device type 2740

Ergonomic lifting

Application

The mobile lifting device is ideal for lifting and tilting 200 l standard trolleys according to DIN 9797. It enables easy removal of sections up to a lifting weight of 300 kg.

Version

- Lifting height due to carriage inclination approx. 347 mm
- Withdrawal height for 200 l standard trolley approx. 1,047 mm
- The standard trolley tilts approx. 15° towards the operator
- Load/stroke weight max. 300 kg
- Manual control valve up/down, incl. maintenance unit
- With standard trolley, the lifting frame must not be moved
- Made of stainless steel, W-No. 1.4301


Options

- Mobile or stationary version
- Adaptation to special containers possible

Technical data

Lifting weight	Max. 300 kg
Compressed air supply	6 bar over 1/2" quick release
Unloaded weight	Approx. 110 kg

Technical data may be subject to changes

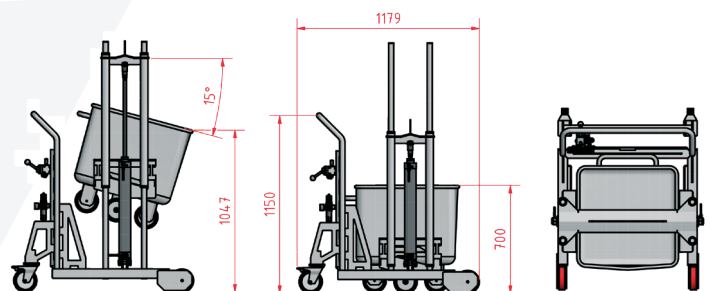

Contact

CN: shanghai@frontmatec.com
Phone: +86 215 859 4850

DK: kolding@frontmatec.com
Phone: +45 763 427 00

NL: rijssen@frontmatec.com
Phone: +31 886 294 000

UK: birmingham@frontmatec.com
Phone: +44 121 313 3564

frontmatec.com

DE: beckum@frontmatec.com
Phone: +49 252 185 070

ES: barcelona@frontmatec.com
Phone: +34 932 643 800

RU: moscow@frontmatec.com
Phone: +7 495 424 9559

US: kansascity@frontmatec.com
Phone: +1 816 891 2440